





RENDER

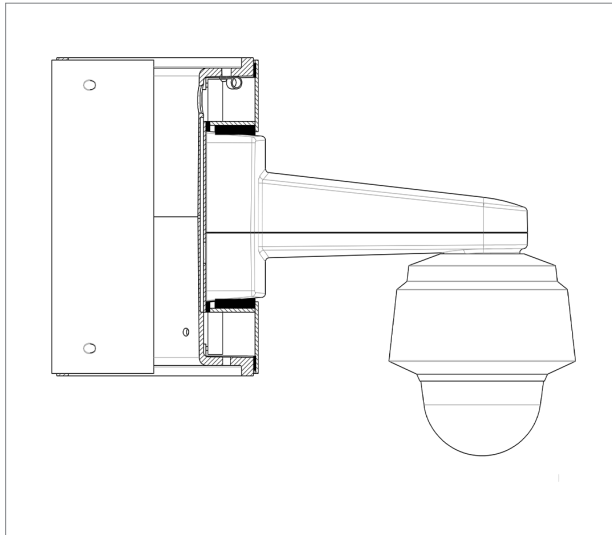

PTZ CAMERA, SIDE VIEW

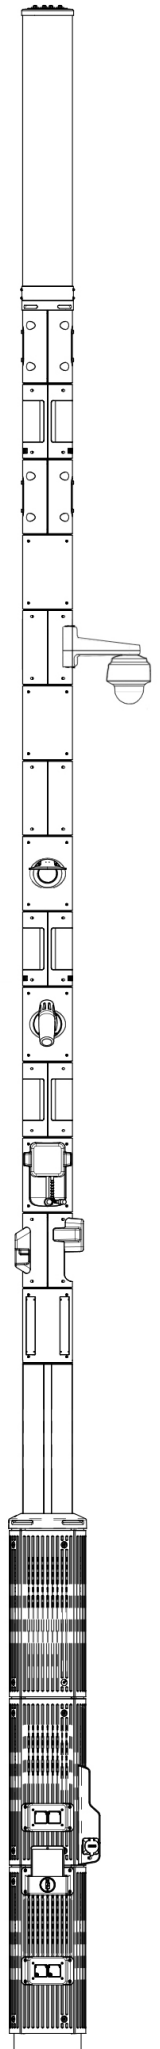

PTZ Camera

SAFETY

The PTZ (Pan/Tilt/Zoom) Camera provides the SMART.NODE™ with top-of-the-line, outdoor-ready CCTV services with HDTV 1080p, 32x optical zoom and rapid pan/tilt capabilities for wide area coverage and detailed surveillance at a distance.

Thanks to high light sensitivity and day/night functionality, high image quality is ensured even in low-light conditions. At the same time, new technologies have reduced the bandwidth and storage requirements.

With shock detection, automatic defog and built-in video analytics, including compensation, object removal, enter/exit detection and auto-tracking, the PTZ Camera is well suited to a range of outdoor environments.

Equipment List

ENE.HUB have the unique ability to be able to offer clients a range of digital cameras with a variety of attributes:

- Static and PTZ (Pan / Tilt / Zoom)
- Flush Mount and Outreach Arm Slung (Inverted Snow Globe)
- 720p to 4k resolution capacity
- Internal memory capacity
- Electronic 'pinch' zoom
- Mechanical zoom from 6x to 40x
- Range of video compression ratios and file type
- On board video analytics
- High level of water, dust and vandal protection
- Wide operating temperature range
- Variety of dome covers

ENE.HUB

THE TECHNOLOGY ACCOMMODATED BY THE SMART.NODE™ IS CONTINUOUSLY EVOLVING. ENE.HUB CAN INVESTIGATE THE ACCOMMODATION OF ADDITIONAL SCS DEVICES.

www.ene-hub.com